

Fig. 1

receiving a message that a game application is executed on a mobile terminal devie 30

generating an authorization for a restricted execution of said game application within predetermined limits 32

sending said authorization to said mobile terminal device. 34

Fig. 2

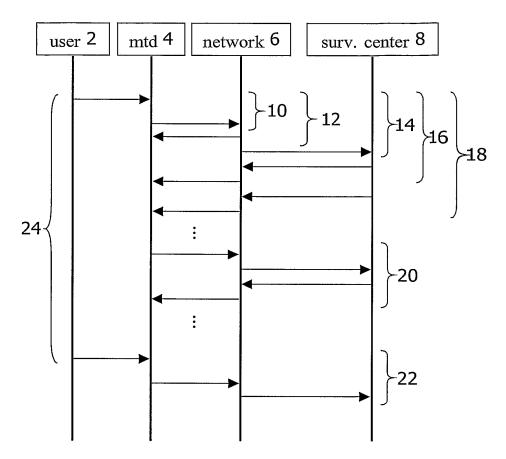
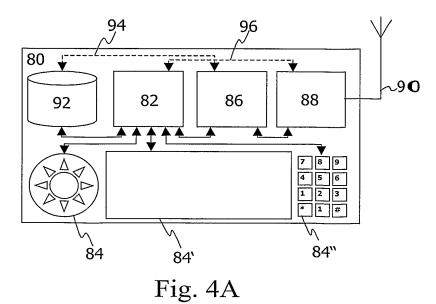


Fig. 3



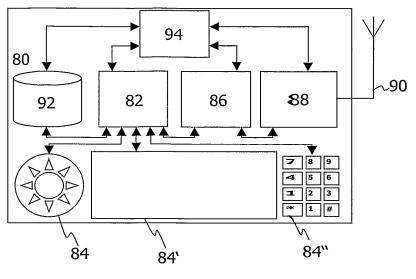


Fig. 4B

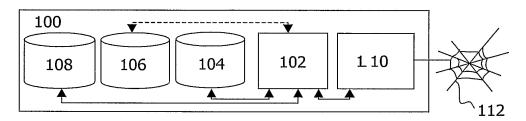


Fig. 5

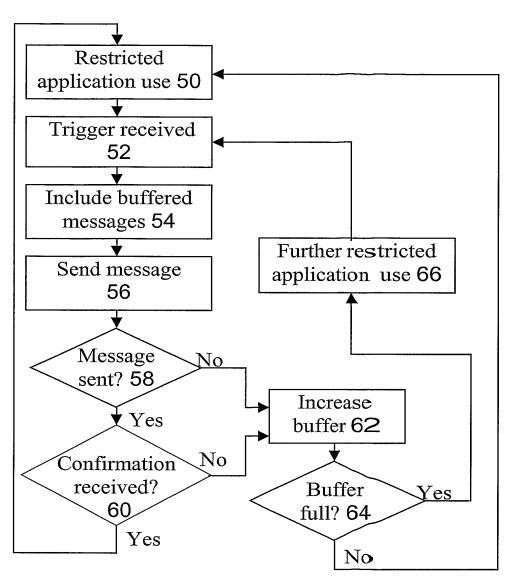


Fig. 6